

CONTACT SMART CARD READER

ACR40T

COMPACT & MODERN

ACR40T is ACS's newest compact high-speed USB contact SIM-sized smart card reader. It supports firmware upgrade, as well as **ISO 7816 Class A, B and C smart cards** (5 V, 3 V, 1.8 V), **microprocessor cards** with the T=0, T=1 protocol, and a wide variety of memory cards in the market.

Combining sophisticated and ground-breaking modern technology, the competitive advantage of ACR40T lies in its compact size and sliding smart card entry slot, allowing for hassle-free application.

ACR40T is also available in premium, providing users with a built-in button for specific application usage. This function is also essential for acknowledging user presence as it ensures that the user is physically present in order to interact with the application.

Compliant with both CCID and PC/SC as well as Microsoft® WHQL, ACR40T is also compatible with various operating systems such as **Windows®**, **Linux®**, **macOS®**, **Android™**, and is able to connect with both USB Type-A and USB Type-C respectively.

KEY FEATURES

Multiple Configurations

- Standard: Basic card read/write support
- Premium: Built-in button for user-defined secure application usage (i.e. multi-factor authentication)

Supports Various Types of Contact Cards

- o ISO 7816 Class A, B and C (5 V, 3 V and 1.8 V)
- Microprocessor Card (T=0, T=1)
- Memory Card

☑ Reliable

- Certified for international regulations
 - UL 62368, CE, UKCA, FCC, RoHS, REACH, VCCI, Microsoft® WHQL
- o Mean Time Between Failures (MTBF) up to 600k Hours
- o Card Insertion Cycles: 100k Times
- o Short Circuit Protection

Compatible

- Supports all major operating systems
 - Windows[®], Linux[®], macOS[®], Android[™]



COMMON APPLICATIONS

- e-Government
- e-Banking and e-Payment
- e-Healthcare

Public Key Infrastructure

Network Security




TECHNICAL SPECIFICATIONS

| Contact Smart Card In | terface |
|-----------------------|-----------------------------------|
| Number of Slot(s) | 1 SIM-Sized Card Slot (2FF) |
| | ISO 7816 Parts 1-4, Class A, B, C |
| Supported Card | (5 V, 3 V, 1.8 V), |
| Types | Microprocessor Card (T=0, T=1), |
| | Memory Card |
| Supply Current | Max. 50 mA |
| Read/Write Speed | 9.6 – 600 Kbps |
| Clock Frequency | 4.80 MHz |
| Card Connector | 6pin Contact |
| Card Insertion Cycles | Min. 100,000 |
| PPS (Protocol and | |
| Parameters | Supported |
| Selection) | |
| Short Circuit | Supported |
| Protection | Capponica |
| Host Interface | |
| Protocol | USB CCID |
| Connector Type | Standard Type-A/Type-C |
| Speed | USB 2.0 Full Speed (12Mbps) |
| Supply Voltage | 5 V |
| Application Programm | ning Interface |
| PC-Linked Mode | PC/SC |
| Other Features | |
| Firmware Upgrade | Supported |

| D | |
|--|---|
| Physical Characteristics | |
| | Type-A: 48.9mm (L) x 17.8mm |
| Dimensions | (W) × 8.0mm (H) |
| Diffictions | Type-C: 44.7mm (L) × 17.8mm |
| | (W) × 8.0mm (H) |
| NA/ : 1 : | Type-A: 7.63 g ± 0.76 g |
| Weight | Type-C: 5.20 g ± 0.52 g |
| Available Colour(s) | Black |
| Peripherals | |
| LED | Green |
| Operating Conditions | |
| Temperature | 0 - 65°C |
| Humidity | 95% (Non-Condensing) |
| MTBF | 600,000 Hours |
| Certifications & Compliances | |
| Certifications & Compli | ances |
| Certifications & Compli | ances UL 62368, CE, UKCA, FCC, |
| Certifications & Compli | UL 62368, CE, UKCA, FCC, |
| | |
| Certifications | UL 62368, CE, UKCA, FCC, RoHS, REACH, VCCI, Microsoft® WHQL |
| Certifications | UL 62368, CE, UKCA, FCC, RoHS, REACH, VCCI, Microsoft® |
| Certifications Compliances Drivers & Support | UL 62368, CE, UKCA, FCC, RoHS, REACH, VCCI, Microsoft® WHQL USB CCID, PC/SC |
| Certifications | UL 62368, CE, UKCA, FCC, RoHS, REACH, VCCI, Microsoft® WHQL USB CCID, PC/SC Windows®, Linux®, macOS®, |
| Certifications Compliances Drivers & Support Driver Supported OS | UL 62368, CE, UKCA, FCC, RoHS, REACH, VCCI, Microsoft® WHQL USB CCID, PC/SC |
| Certifications Compliances Drivers & Support Driver Supported OS Model/Part Number | UL 62368, CE, UKCA, FCC, RoHS, REACH, VCCI, Microsoft® WHQL USB CCID, PC/SC Windows®, Linux®, macOS®, Android TM |
| Certifications Compliances Drivers & Support Driver Supported OS Model/Part Number Standard | UL 62368, CE, UKCA, FCC, RoHS, REACH, VCCI, Microsoft® WHQL USB CCID, PC/SC Windows®, Linux®, macOS®, Android TM ACR40T-A1 (USB Type-A) |
| Certifications Compliances Drivers & Support Driver Supported OS Model/Part Number Standard [Loop String Not Included] | UL 62368, CE, UKCA, FCC, RoHS, REACH, VCCI, Microsoft® WHQL USB CCID, PC/SC Windows®, Linux®, macOS®, Android TM ACR40T-A1 (USB Type-A) ACR40T-A5 (USB Type-C) |
| Certifications Compliances Drivers & Support Driver Supported OS Model/Part Number Standard [Loop String Not Included] Premium | UL 62368, CE, UKCA, FCC, RoHS, REACH, VCCI, Microsoft® WHQL USB CCID, PC/SC Windows®, Linux®, macOS®, Android TM ACR40T-A1 (USB Type-A) ACR40T-A5 (USB Type-C) ACR40T-A6 (USB Type-A) |
| Certifications Compliances Drivers & Support Driver Supported OS Model/Part Number Standard [Loop String Not Included] | UL 62368, CE, UKCA, FCC, RoHS, REACH, VCCI, Microsoft® WHQL USB CCID, PC/SC Windows®, Linux®, macOS®, Android TM ACR40T-A1 (USB Type-A) ACR40T-A5 (USB Type-C) |

MECHANICAL SPECIFICATIONS

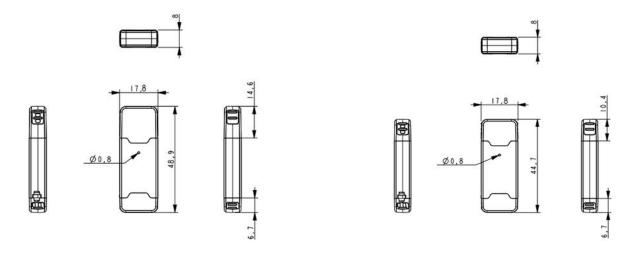

Pictured Above: ACR40T-A1 [Type-A]¹ Pictured Above: ACR40T-A5 [Type-C]¹

About ACS

Advanced Card Systems Ltd. (ACS), founded in 1995, is Asia Pacific's top supplier and one of the world's top 3 suppliers of PC-linked smart card readers. ACS is the winner of the Product Quality Leadership Award for Smart Card Readers from Frost & Sullivan. In 2010, 2014 and 2015, ACS was listed in Forbes Asia's "Best Under a Billion" list, an inter-industry list comprised of 200 top-performing publicly listed companies in the Asia-Pacific, with sales between US\$5 million and US\$1 billion. ACS develops a wide range of high-quality smart card reading/writing devices, smart cards and related products and distributes them to over 100 countries worldwide.

Click <u>here</u> for Sales Enquiry Tel: +852-2796-7873 Fax: +852-2796-1286



¹ Note: Both ACR40T-A6 [Type-A] and ACR40T-A7 [Type-C] contain a built-in button on the rear end of the reader.